




VINYL

by lalegno 

WOOD
—REDEFINED



— FLOORS
WITH
STYLE

COLLECTION

ALL ABOUT — Rigid

Lalegno Rigid Vinyl Plank consists of two distinct ranges:

- **RVP (RIGID VINYL PLANK)**

A range of wood-finish planks in 1220mm lengths.

- **RVH (RIGID VINYL HERRINGBONE)**

A range of wood-finish herringbone planks in 400mm lengths.

- **EXTRA MATT TOPCOAT**

Transparent matt finish with anti-scratch Aluminium Oxide coating for highly durable surface protection that is easy to maintain.

- **0.7mm WEAR LAYER**

The commercially rated 0.7mm wear layer is exceptionally durable and preserves the authentic EIR finish, protecting from scuffs and stains.

- **EIR MATCHES THE WOOD**


EIR finish produces a textured surface which exactly matches the grain of the wood or stone image below for a highly authentic and natural appearance.

- **Latest SPC (Stone Power Composite) technology**

Ultra strong Rigid core. The SPC core is made by combining limestone powder and stabilisers to create a dimensionally stable and waterproof core. Contains no heavy metals or formaldehyde nor any other harmful substances and is 100% environmentally responsible flooring.

- **BUILT-IN UNDERLAY**

1mm thick integrated IXPE underlay with 19dB impact sound absorption which also gives it an excellent feeling underfoot.

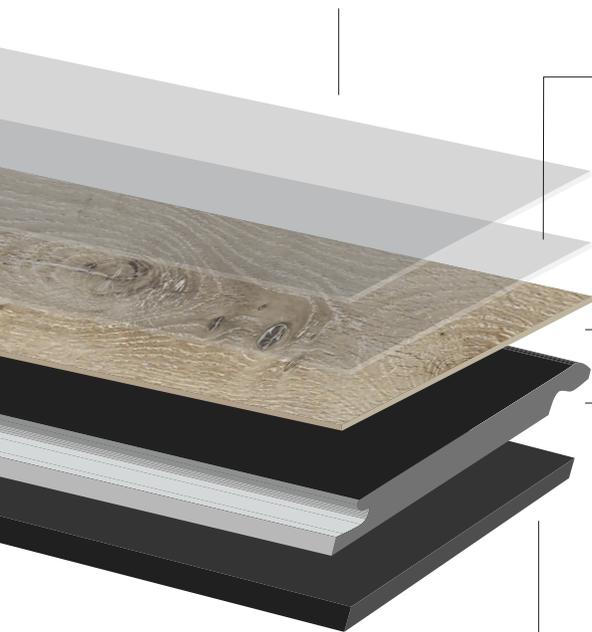

01.

10
ADVANTAGES

7

02.

RIGID
–FLOORS

19

03.


LUXURY VINYL
–FLOORS

29

04.

TECHNICAL
–INFO

35



RIGID FLOORS — 10 ADVANTAGES



1. DURABLE 0.7 MM WEAR LAYER

Built to withstand daily life. The 0.7 mm wear layer provides exceptional protection against scratches, scuffs, dents, and general wear and tear. Ideal for high-traffic areas, busy homes, or commercial spaces, it keeps your floors looking fresh and vibrant for years. Enjoy a combination of style, strength, and resilience that lasts.



2. UNDERFLOOR HEATING

Our vinyl flooring is fully compatible with underfloor heating, efficiently conducting warmth while maintaining stability and performance. Enjoy energy-efficient comfort without compromising on appearance or longevity—perfect for modern homes, offices, or any space where cozy, even heat is desired.



GUBBIO


3. TRU GRAIN TECHNOLOGY

Bring the natural beauty of wood into your home with our Tru Grain embossed-in-register technology, aligns surface texture with realistic wood patterns underneath, creating depth, character, and authentic tactile appeal. Each plank captures subtle knots, grains, and natural variations, giving you the elegance of real hardwood with the durability, comfort, and easy maintenance of vinyl.



TRU GRAIN EMBOSSED

BARBARESCO

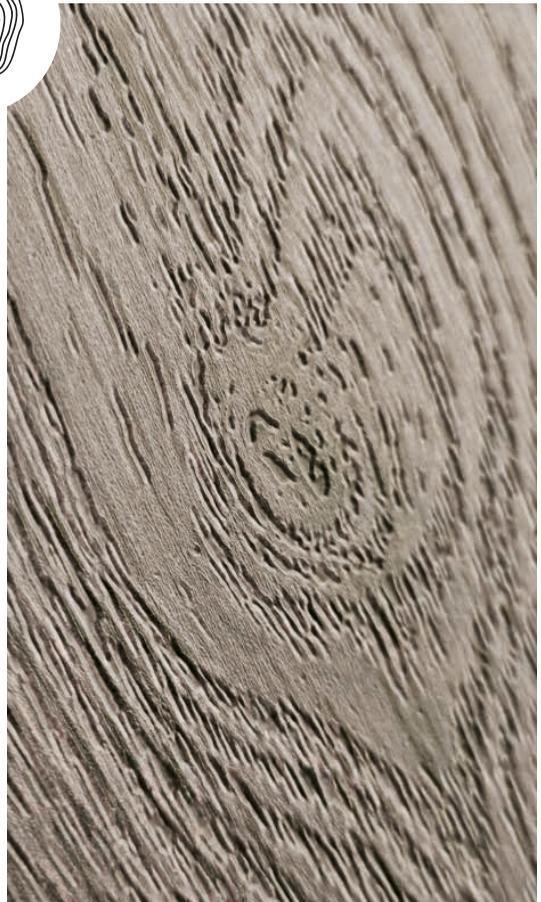


TRU GRAIN EMBOSSED



LIMONCELLO - HERRINGBONE

4. EASY TO MAINTAIN

Spend less time cleaning and more time enjoying your home. Our non-porous vinyl resists stains, scuffs, and dirt, making routine cleaning as simple as a quick sweep or light mop. No sealing, treatments, or special products are needed. Perfect for busy households and high-traffic areas, it delivers enduring style with minimal effort.

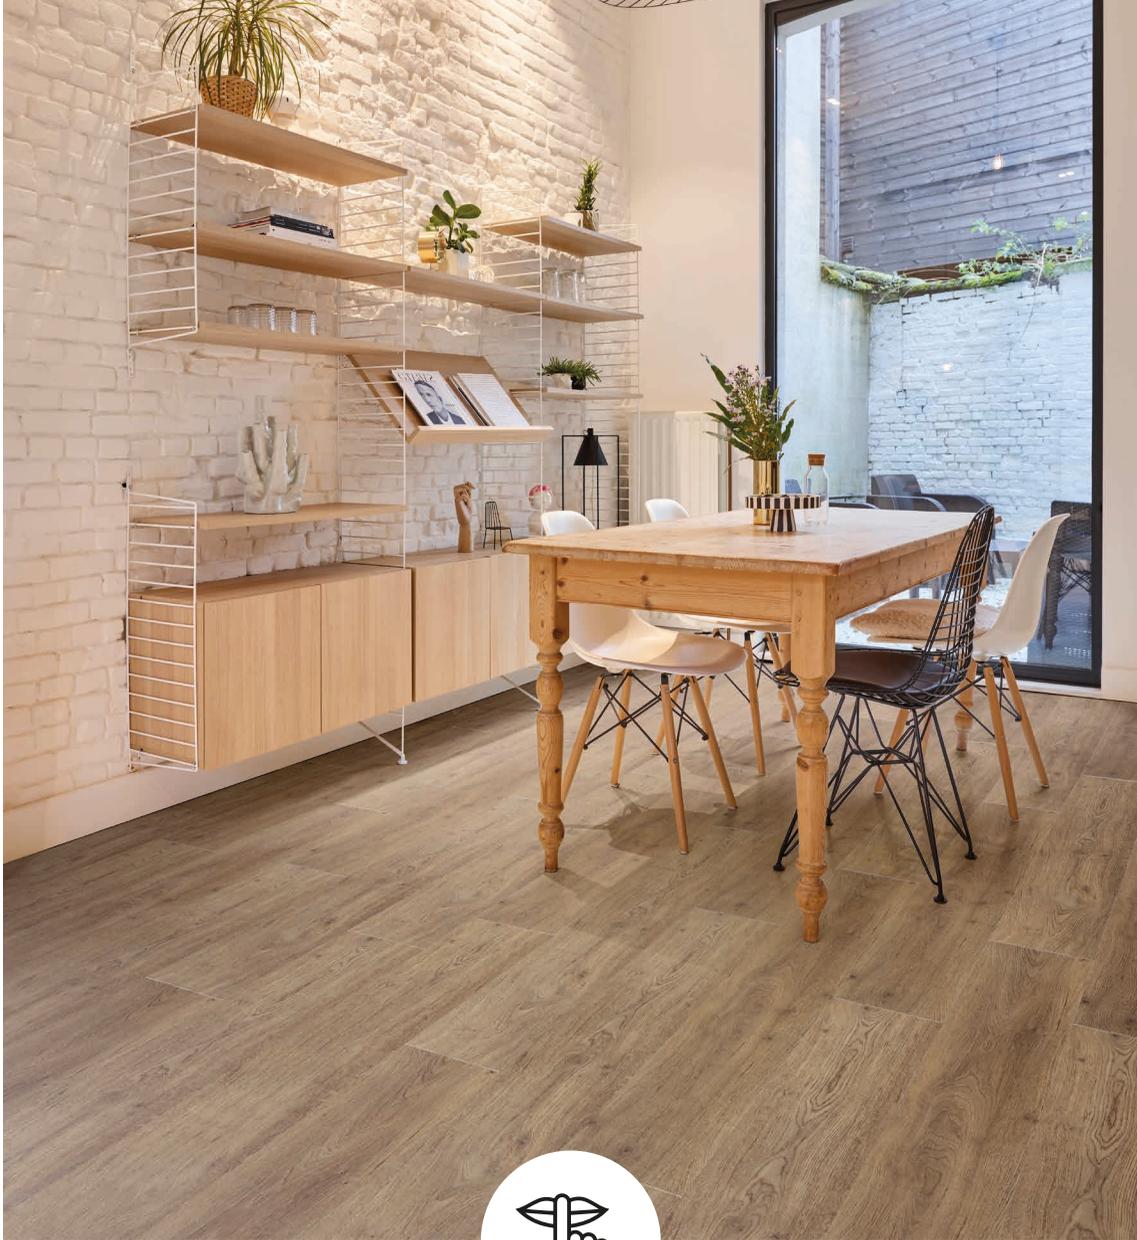

MONTALCINO




5. ACOUSTIC COMFORT

Step into a quieter home. Our rigid vinyl flooring includes a built-in sound-reducing underlay that absorbs impact noise and reduces sound by up to 19dB. Footsteps, everyday movement, and other household sounds are softened, creating a peaceful, comfortable environment—ideal for multi-level homes, apartments, and commercial spaces.



6. SLIP-RESISTANT

Safety and style go hand in hand. Our vinyl floors feature a 36+ PTV anti-slip rating, providing secure footing in wet or high-traffic areas like kitchens, bathrooms, and hallways. The textured surface enhances grip while complementing the realistic wood finish. Durable and reliable, it helps prevent slips and falls without compromising your floor's appearance.

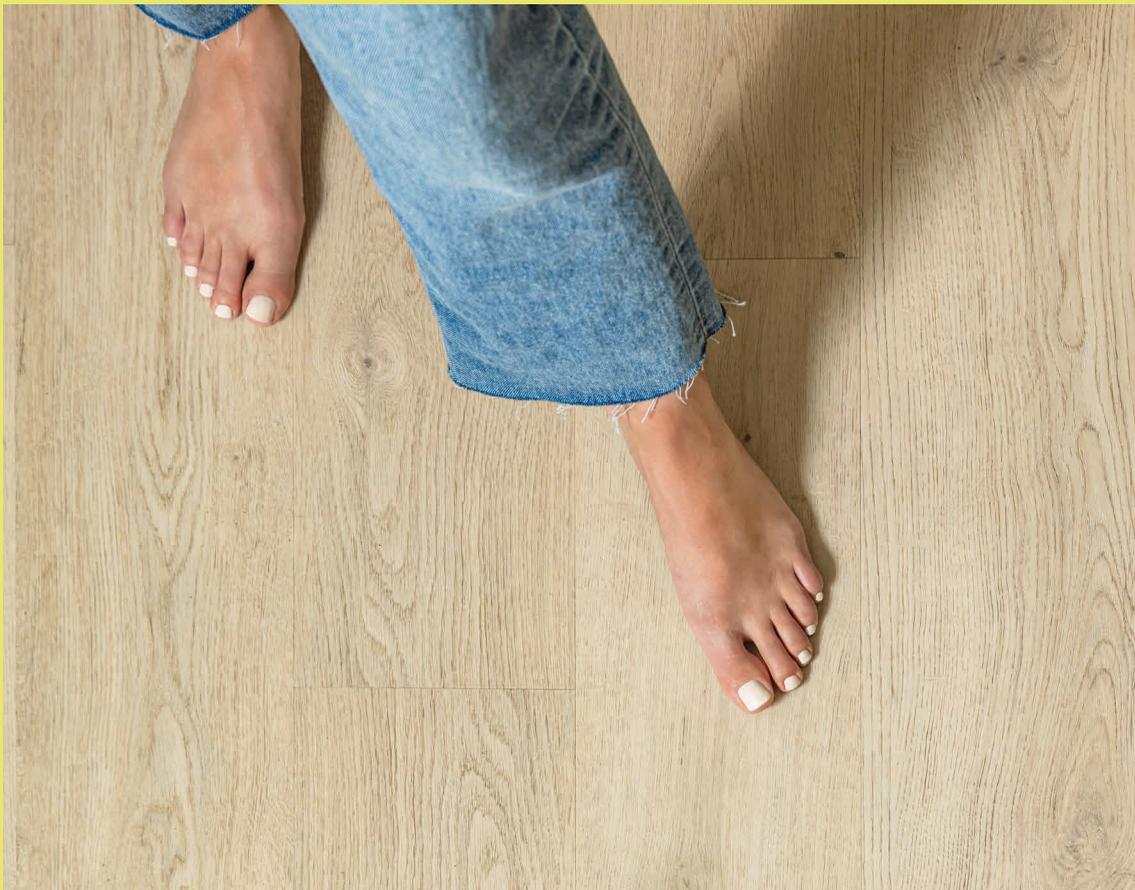

GUBBIO



7. EASY INSTALLATION

Enjoy stress-free installation. Our innovative 5G click system locks planks together seamlessly, allowing for a fast, glue-free installation. The result is a smooth, stable surface that looks professional from day one. Whether you're a skilled DIYer or prefer professional help, our system ensures a flawless, long-lasting finish with minimal effort.



RIGID FLOORS - WITH CLICK SYSTEM






BAROLO



8. WATER RESISTANT

Say goodbye to water damage! Our vinyl flooring is water resistant, making it perfect for kitchens, bathrooms and living rooms. Its non-porous surface prevents spills, splashes, and everyday accidents from seeping through, protecting your floor and home. Enjoy long-lasting beauty and strength even in the busiest or most moisture-prone spaces, without the worry of warping or swelling.

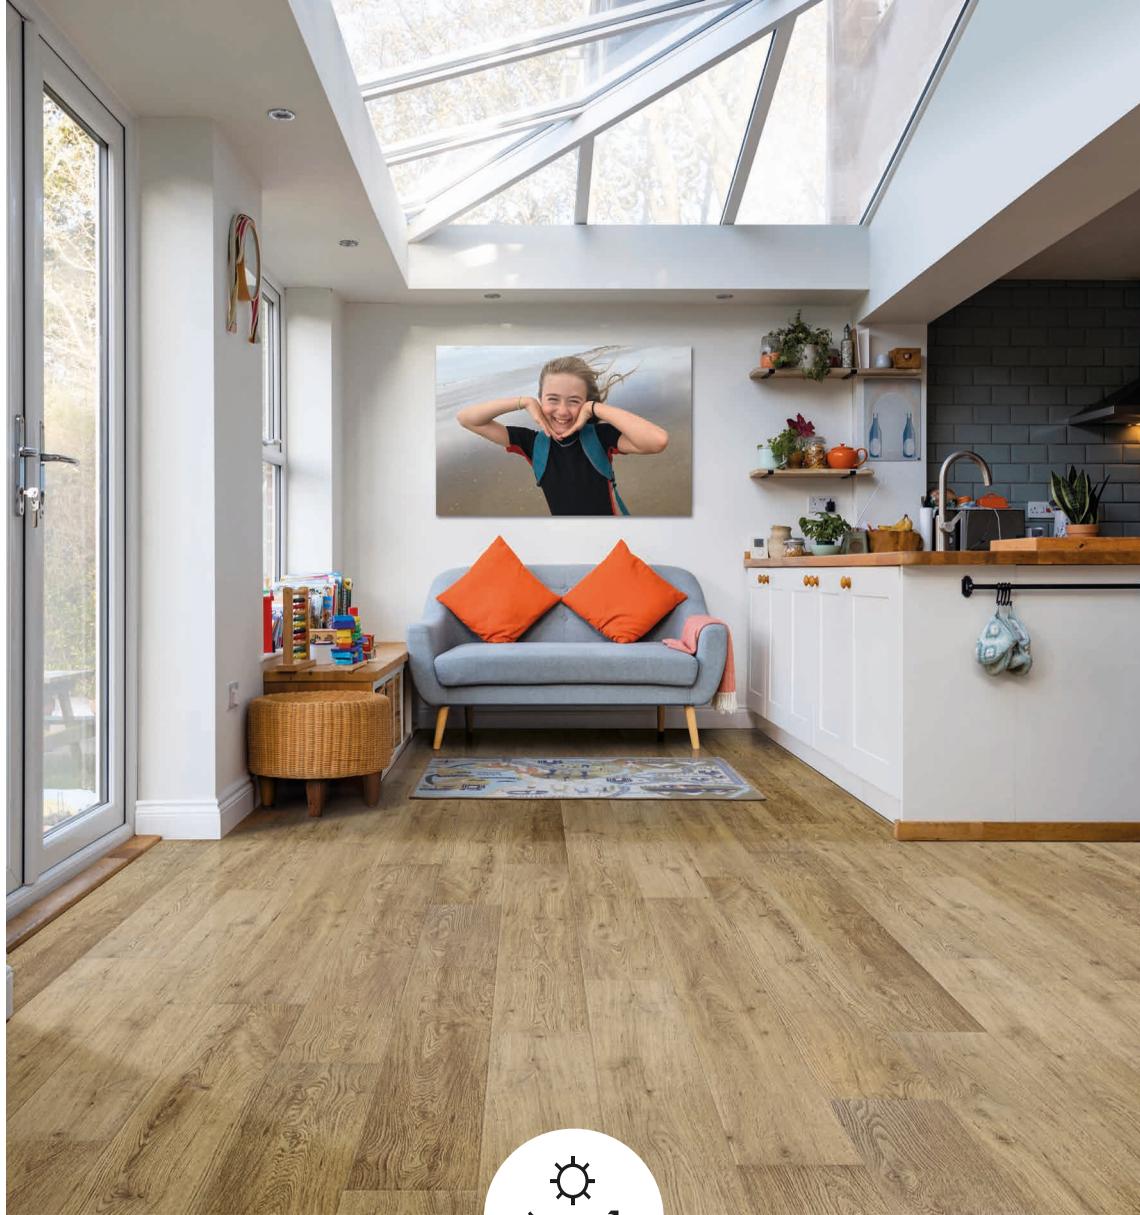

VENETO



9. UV RESISTANT

Keep your floors looking like new. Our UV-resistant vinyl protects against fading or discoloration caused by sunlight, preserving vibrant colours and natural beauty. Even in rooms with large windows or direct sunlight, your floors remain fresh, bright, and inviting year after year.



10. **LOW VOC**

Your health matters. Our vinyl flooring carries an A+ VOC rating, meaning it releases minimal chemical emissions. This ensures excellent indoor air quality, creating a cleaner, safer environment for your family, employees, or customers. Combine peace of mind with a stylish, high-performance floor that supports a healthier lifestyle.



AREZZO

Rigid VINYL — PLANKS

6,50 MM PLANKS

Rigid VINYL — PLANKS

6,50 MM - AVAILABLE IN 12 COLOURS

LIMONCELLO



Total thickness of 6.50 mm - Wear layer of 0.70 mm and integrated backing.
Dimensions: 180 x 1220 mm.

MONTALCINO



LOIRE



AREZZO



NEBBIOLO



GUBBIO



JESI





PROVENCE

MONTALCINO



VENETO




PALERMO



BARBARESCO



BAROLO

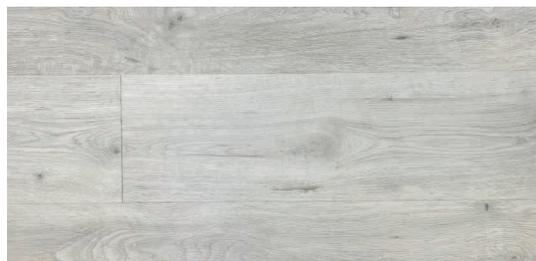



VENETO



BAROLO



AREZZO



JESI



BARBARESCO

Rigid VINYL — HERRINGBONE

6,50 MM - AVAILABLE IN 3 COLOURS

AREZZO - HERRINGBONE



Total thickness of 6.50 mm - Wear layer of 0.70 mm and integrated backing.
Dimensions: 120 x 600 mm.

MONTALCINO - HERRINGBONE



LIMONCELLO - HERRINGBONE





AREZZO - HERRINGBONE

STICK-DOWN — LVT

2,50 MM PLANKS

LUXURY VINYL — FLOORS

2,50 MM - AVAILABLE IN 10 COLOURS

LIMONCELLO - STICK-DOWN



Total thickness of 2.50 mm. Wear layer of 0.70 mm dry back.
Dimensions: 184 x 1219 mm.

MONTALCINO - STICK-DOWN



AREZZO - STICK-DOWN



PROVENCE - STICK-DOWN



GUBBIO - STICK-DOWN



LOIRE - STICK-DOWN





PALERMO - STICK-DOWN

VENETO - STICK-DOWN



PALERMO - STICK-DOWN



BARBARESCO - STICK-DOWN



BAROLO - STICK-DOWN



LUXURY VINYL — FLOORS

2,50 MM - AVAILABLE IN 9 COLOURS

AREZZO - HERRINGBONE



Total thickness of 2.50 mm - Wear layer of 0.70 mm.
Dimensions: 100 x 400 mm.

MONTALCINO - HERRINGBONE




BAROLO - HERRINGBONE



LIMONCELLO - HERRINGBONE



PROVENCE - HERRINGBONE

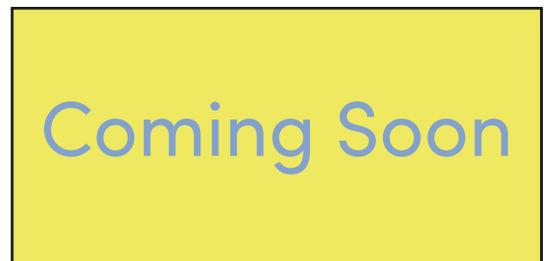



AREZZO - HERRINGBONE

PALERMO - HERRINGBONE



GUBBIO - HERRINGBONE



LOIRE - HERRINGBONE



BARBARESCO - HERRINGBONE



Technical — INFORMATION

TECHNICAL DATA SHEET

TEST	STANDARD	RESULT			
BASIC DATA					
Dimensions	EN ISO 24342	LVT PLANK	LVT HERRINGBONE	RVP	RVH
		184 x 1219mm	100 x 400mm	180 x 1220mm	120 x 600mm
Pack Size	EN ISO 24342	3.59m ²	2.88m ²	2.2m ²	1.15m ²
Thickness	EN ISO 24347	2.5mm	2.5mm	6.5mm	6.5mm
Wear Layer	EN ISO 24340	0.70mm	0.70mm	0.70mm	0.70mm
Installation		Glue down	Glue down	5G Click	Click
Embossing		EIR	Standard	EIR	Standard
Surface Treatment		ALL RANGES: PU coating + protected with Aluminium Oxide (anti-scratch) and stain-resistant technology			
Core		n/a	n/a	Water-resistant rigid SPC core	
TECHNICAL DATA					
Bevelled Edge		4 x micro-bevels per plank		4 per plank	
Mass	ISO 23997	4.5 kg/m ²		10.80 kg/m ²	
Standards	EN 649/EN ISO 10582	n/a		Pass	
Classification	EN 685/EN ISO 10874 EN 685/EN ISO 10874 EN 685/EN ISO 10874	42: Light Industrial General 33: Commercial Heavy 23: Domestic Heavy		42: Light Industrial General 33: Commercial Heavy 23: Domestic Heavy	
Reaction to Fire	EN 13501-1	B _{f1} -s1		B _{f1} -s1	
Staining Resistance	ISO 26987	Pass		EN 423 - Pass	
Light Fastness	EN ISO 105-B02	≤6		>6	
Dimensional Stability	EN 434 / EN ISO 23999	≤0.15		≤0.10	
Acoustic Impact - Noise Reduction	EN ISO 717-2 EN ISO 140-8	n/a		ΔL _w =19dB	
Curling Resultant to Heat	ISO 23999	≤1.5		n/a	
Indentation - Residual	EN 433 EN ISO 24343-1	≤0.10		≤0.10	
Castor Chair - Continuous Use	ISO 4918	Pass		EN 425 – Pass ISO 4918 – Pass	
Slip Resistance*	EN 16165	36 PTV		36 PTV	
Wear Resistance	EN 660-2	Class T		EN 13329 (Annex E) – AC5	
Impact Resistance	EN 13329	≥1800mm, IC5		≥1200mm	
Click Tension	Internal	n/a		200 N/5cm	
Swelling	ISO 24336	n/a		Pass	
Underfloor Heating (UFH)		Guaranteed for use with water-based UFH systems. Installation guidelines must be strictly followed.			
Installation notes - IMPORTANT		Must NOT be installed in conservatories or in direct sunlight. Contact us for further advice.			
DANGEROUS SUBSTANCES					
VOC Emission	French VOC Regulation (ISO 16000)	A+		A+	
E1 Formaldehyde - HCHO Emission	EN 717-1	Class E1, ND		Class E1	


*Slip-resistance is measured on ex-factory product on a level horizontal plane. Slip-resistance can be affected by surface contamination, use, and how the product is maintained.

LVT (Plank & Herringbone)



Rigid Vinyl Plank (RVP / RVH)



by lalegno 

WOOD
—**REDEFINED**